


Datasheet

Absen Polaris PL4.8W Plus V2

The perfect LED material for large events. Lighter, cheaper and easy to handle. Available in two different sizes! Upon request, we can also offer you suitable rigging or stacking material.

LED Type	SMD 3in1 1921
Pixel Pitch	4.8 mm
Resolution	104x104 / 104x208
Panel Dimensions (WxHxT)	500x500x78 mm / 500x1,000x78 mm
Panel Weight	8 kg / 13 kg
Brightness	4,500 nit
Refresh Rate	3,840 Hz
Grayscale	14 Bit
Contrast Ratio	4,500:1
Viewing Angle (h/v)	140° / 120°
Operating Temperature	-20~ °C / +50 °C
IP Rating (Front/Back)	IP65 / IP54
Power Consumption per Panel	Max. 600 W/m ² , Average 200 W/m ²
Module Maintenance	Front / Back
Panel Installation Type	Rigging / Stacking
Maximum Hanging (vertical)	20 Panels / 10 Panels

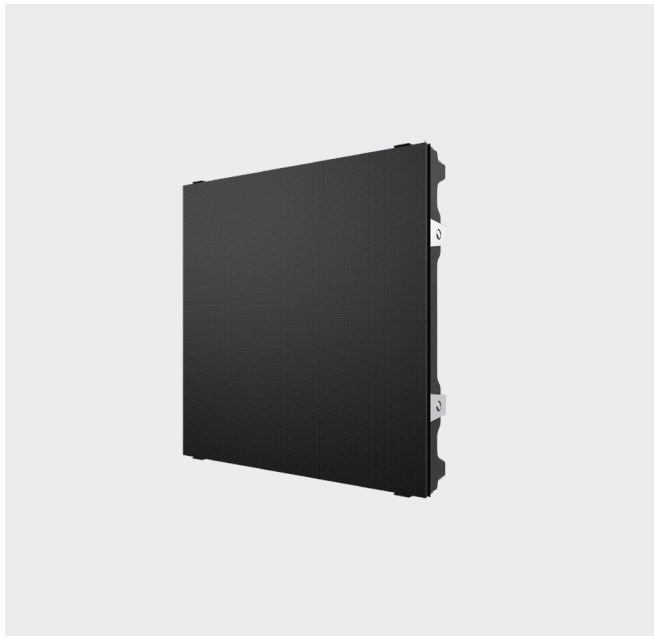

✓ The Price-Performance Champion

Do you have any questions?
Our sales team is happy to assist you!

✉ vertrieb@niclen.de

☎ +49 231 99961 0